

# BIN LEVEL CONTROLS



## BMRX POWER PACS

MODEL	VOLTAGE	DESCRIPTION	PRICE
BMRX-115	115 VAC	BinMaster Rotary Level Indicator, Triple Thread Screw Off Cover, Dual Conduit Entries, DPDT Relay Contacts, Selectable Fail-Safe Protection, USDA Approved Powder Coated Finish, Hazardous Location Approved, C/US listed for Class I, Groups C & D and Class II, Groups E, F & G.	★
BMRX-230	230 VAC		★
BMRX-24AC	24 VAC		★
BMRX-24DC	24 VDC		★
BMRX-12DC	12 VDC		★

## MAXIMA+ FAIL-SAFE POWER PACS

MODEL	VOLTAGE	DESCRIPTION	PRICE
MAXIMA+ AC	24/115/230 VAC	Hazardous Location Approved, C/US listed for Class II Groups E, F, G. Visual L.E.D. status light monitoring paddle rotation, paddle covered, fault conditions, complete with D.P.D.T. Relay Contacts, Fail-Safe protection, and S.P.D. T. Normal and Fault Relay contact, USDA Approved Powder Coated Finish	★
MAXIMA+ 24 DC	24 VDC		★
MAXIMA+ 12 DC	12 VDC		★
			★

## MAXIMA+ SOLID STATE STATUS RELAY OPTIONS

To Order Maxima+ Solid State Relay Option select the Maxima+ Power Pac part number and add the options Order Code at the end of the part number. Example A 730-0528-SSR-1 would be a Maxima+ with 1 A 250 VAC Solid State Relay.

ORDER CODE	DESCRIPTION	PRICE
SSR-1	1A 250 VAC Solid State Status Relay Option for Pulse Mode Operation	★
SSR-2	1A 60 vdc Solid State Status Relay Option for Pulse Mode Operation	★

## SHAFT COUPLERS

MODEL	DESCRIPTION	PRICE
GRSS-1	Solid Shaft -316 Stainless Steel Side Mount Coupler	★
GRFC-1	Flexible -316 Stainless Steel Top Mount Coupler	★
BSA	Bindicator Shaft Adapter - 316 Stainless Steel	★
GRFS-1	Molded Neoprene Flexible Shaft - 316 Stainless Steel Top or Side Mount Coupler	★

## SIDE MOUNTING PLATES


MODEL	DESCRIPTION	PRICE
GRMP-1	0° Mild Carbon Steel Half Coupling with fiber gasket	★
GRMP-3	0° 316 Stainless Steel Half Coupling with fiber gasket	★

## TOP MOUNTING PLATES

MODEL	DESCRIPTION	PRICE
GRMP-2	0° Mild Carbon Steel Full Coupling with fiber gasket	★
GRMP-4	0° 316 Stainless Steel Full Coupling with fiber gasket	★
GRMP-11	5° Mild Carbon Steel Full Coupling Powder Coated with fiber gasket	★
GRMP-9	10° Mild Carbon Steel Full Coupling Powder Coated with fiber gasket	★
GRMP-13	30° Mild Carbon Steel Full Coupling Powder Coated with fiber gasket	★

## PADDLES

MODEL	DESCRIPTION	PRICE
GRP-11	High Strength Nylon Paddle for materials up to 30 lbs./ft <sup>3</sup> , triple bladed paddle turns in Ø7", blades are 2" wide	★
GRP-12	High Strength Nylon Paddle for materials 30 to 70 lbs./ft <sup>3</sup> , triple bladed paddle turns in Ø5"	★
GRP-1	For light materials up to 30 lbs./ft <sup>3</sup> , triple bladed 316 Stainless steel Paddle turns in a Ø7", paddle blades are 2"	★
GRP-2	For medium materials from 30 to 70 lbs./ft <sup>3</sup> , 3 bladed 316 Stainless Steel Paddle turns in a Ø5", paddle blades	★
GRP-3	For heavy materials +70 lbs./ft <sup>3</sup> , 1 blade 316 SS Paddle 2½" long & turns in a Ø5", insertable paddle blade is	★
GRP-22	For heavy materials +70 lbs./ft <sup>3</sup> , 3 bladed 316 SS Paddle turns in a Ø5", paddle blades are 1"x1/8"	★
GRP-23	For medium and heavy materials, 1 bayonet blade, 316 SS Paddle, insertable paddle blade is 1"x1/8"	★
GRP-24	12" Belt Paddle for use in heavy materials with large particle size	★
GEP-25	For very light materials, 3 bladed 316 SS Paddle turns in a Ø5", paddle blades are 5"x1/16"	★
GRP-26	Direct connect (eliminates need for GRSS-1 Coupler) version of GRP-1	★
GEP-27	Direct connect (eliminates need for GRSS-1 Coupler) version of GRP-2	★
GRP-28	For extremely light materials, 3 bladed 316 SS paddles turn in a Ø7", paddle blades are 5"x1/16"	★
GRP-29	Direct connect (eliminates need for GRSS-1 Coupler) version of GRP-2	★
GRP-30	Direct connect (eliminates need for GRSS-1 Coupler) version of GRP-2	★
GRP-31	Single blade SS Paddle 3-1/4" long and turns in Ø6.5", paddle blade is 1/8" x 1.63"	★
GRP-34	Direct connect 1½" wide single blade paddle folds through a 1 1/4" or 1 1/2" process connection, Ø7.5"	★
GRP-35	Direct connect 1½" wide double blade paddles fold through a 1 1/4" or 1 1/2" process connection, Ø7.5"	★

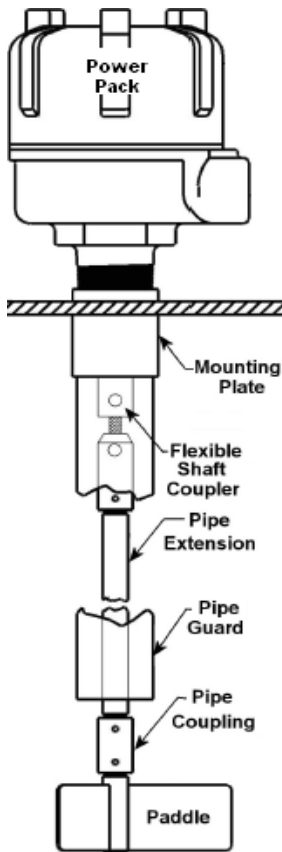

### ¼" Galvanized Shaft Extensions

LENGTH	PRICE
6"	★
12"	★
15"	★
18"	★
24"	★
30"	★
36"	★
48"	★
60"	★
63"	★
72"	★
84"	★

### ¼" 316 Stainless Steel Shaft Extensions

LENGTH	PRICE
6"	★
12"	★
18"	★
24"	★
30"	★
36"	★
48"	★
60"	★
72"	★
84"	★

### ¼" Galvanized Guard Pipe

LENGTH	PRICE
18"	★
24"	★
30"	★
36"	★
48"	★
60"	★
63"	★
72"	★
84"	★

### ¼" 316 Stainless Steel Guard Pipe

LENGTH	PRICE
18"	★
24"	★
30"	★
36"	★
48"	★
60"	★
63"	★
72"	★
84"	★

Please call Premier for custom shaft extensions and guards.