


COMMERCIAL BIN UNLOAD

8" COMMERCIAL HORIZONTAL FLIGHT

LENGTH	BIN DIA	WT	HORSE POWER REQUIREMENTS			PRICE
			Horiz. Unloader	25° UNLOADER	Vert. Unloader	
14'-6"	24'	73	3	5	5	★
16'-0"	27'	80	3	5	5	★
17'-6"	30'	88	5	7.5	5	★
19'-6"	33'-34'	98	5	7.5	5	★
20'-6"	36'	103	5	7.5	5	★
22'-0"	37'-39'	110	5	7.5	5	★
23'-0"	40'	115	5	7.5	5	★
24'-0"	42'	120	5	7.5	5	★
27'-0"	48'-49'	132	5	7.5	5	★
30'-0"	54'-55'	145	5	7.5	5	★
33'-0"	60'	158	5	7.5	5	★
34'-6"	63'	162	5	7.5	5	★
37'-6"	68'-69'	174	7 1/2	10	5	★
39'-0"	72'	183	7.5	10	5	★
40'-6"	75'	190	7.5	10	5	★
42'-6"	78'	198	10	n/a	5	★


7ga flight mounted on 1.9" O.D.
To be used with horizontal, vertical or 25°



10" COMMERCIAL HORIZONTAL FLIGHT

LENGTH	BIN DIA	WT	HORSE POWER REQUIREMENTS			PRICE
			Horiz. Unloader	25° UNLOADER	Vert. Unloader	
14'-6"	24'	93	5	7.5	7.5	★
16'-0"	27'	102	5	7.5	7.5	★
17'-6"	30'	113	5	7.5	7.5	★
19'-6"	33'-34'	125	5	7.5	7.5	★
20'-6"	36'	132	7.5	10	7.5	★
22'-0"	37'-39'	141	7.5	10	7.5	★
23'-0"	40'	147	7.5	10	7.5	★
24'-0"	42'	154	7.5	10	7.5	★
27'-0"	48'-49'	173	7.5	10	7.5	★
30'-0"	54'-55'	192	7.5	10	7.5	★
33'-0"	60'	211	10	15	7.5	★
34'-6"	63'	218	10	15	7.5	★
37'-6"	68'-69'	241	10	15	7.5	★
39'-0"	72'	250	10	15	7.5	★
40'-6"	75'	260	10	15	7.5	★
42'-6"	78'	273	10	n/a	7.5	★
44'-6"	80'	285	15	n/a	7.5	★
45'-6"	82'	292	15	n/a	7.5	★
49'-6"	90'	317	15	n/a	7.5	★
50'-6"	92'	325	15	n/a	7.5	★


7ga flight mounted on 2-3/8"
To be used with horizontal, vertical or 25°

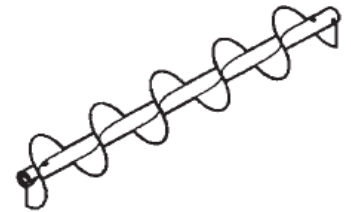

12" COMMERCIAL HORIZONTAL FLIGHT

LENGTH	BIN DIA	WT	HP	PRICE
14'-6"	24'	178	5	★
16'-0"	27'	194	5	★
17'-6"	30'	209	5	★
19'-6"	33'-34'	230	5	★
20'-6"	36'	240	7.5	★
22'-0"	37'-39'	26	7.5	★
23'-0"	40'	273	7.5	★
24'-0"	42'	291	7.5	★
27'-0"	48'-49'	336	7.5	★
30'-0"	54'-55'	349	7.5	★
33'-0"	60'	380	10	★
34'-6"	63'	396	10	★
37'-6"	68'-69'	427	10	★
39'-0"	72'	443	10	★
40'-6"	75'	459	10	★
42'-6"	78'	483	10	★
44'-6"	80'	505	15	★
45'-6"	82'	517	15	★
49'-6"	90'	552	20	★
50'-6"	92'	568	20	★
57'-0"	105'	631	20	★
61'-0"	113'	677	20	★
64'-6"	120'	714	20	★

7ga flight mounted on 2-7/8" O.D.
To be used with horizontal or vertical powerhead.

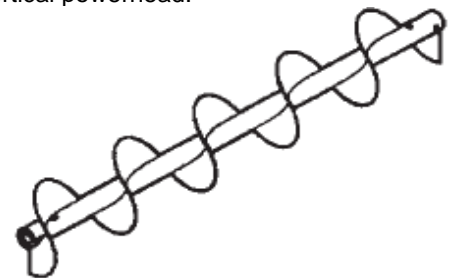

For 1/4" flight option, add ★ per foot to list price.